

## 应用领域 | Application


- 智能家居摄像头 | Smart Home Security Camera



## 产品特点 | Features

- 基于深度学习的轻智能引擎  
Deep learning based smart engine
- 外接DDR接口, 最大支持512MB  
External DDR interface, up to 512MB
- 支持三麦克风输入  
Support three microphone inputs
- 最大支持5百万像素  
Support up to 5MP

## 主要模块 | Block Diagram

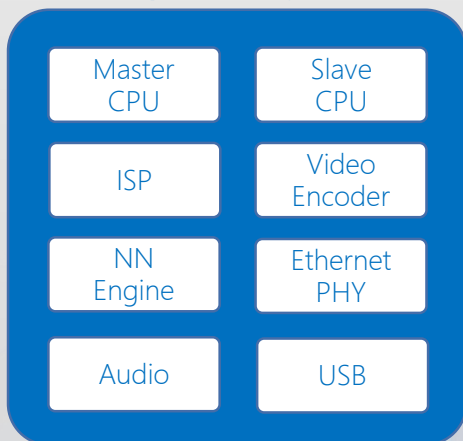

## 产品规格 | Specifications

CPU	Master CPU: up to 996MHz Slave CPU: up to 498MHz
AI Engine	0.5TOPS computation power Human/Car detection Face detection/recognition (optional)
CIS	Support up to 5MP inputs 4-lane MIPI, RGB bayer
ISP	2-frame WDR, local tone mapping 2DNR, 3DNR AE/AWB/AF
Video Encoder	H.264/H.265 video encoder Support up to 5MP Support multi-streams: videox2+JPEGx1 JPEG: up to 5MP@5fps
Audio	Three ADC & single DAC Support 8K~48KHz sampling rate Support echo cancellation
Ethernet	Internal 10M/100M Ethernet PHY
Peripherals	3xI2C, 3xSPI, 3xUART, 2xSDIO 1xUSB2.0 4xSADC, 12xPWM
Memory	External DDR interface, up to 512MB
Package	BGA, 12mmx13.3mm

上海 | Shanghai  
上海市徐汇区宜山路717号6楼  
717 Yishan Road, Block 2, Floor  
6, Xuhui District, Shanghai.  
Tel: +86 21 6112 1558,  
Fax: +86 21 6406 6786

深圳 | Shenzhen  
龙岗区天安云谷6栋东座1005-1007  
Room 1005-1007, Cloud Park  
Building 6 East.  
Longgang District, ShenZhen  
Tel: +86 0755 86255308

成都 | Chengdu  
双流区双兴大道1号电子科大  
大科技园B区6栋3层  
UESTC Campus, B, 6#, 3<sup>rd</sup>  
floor, Shuangliu,  
Chengdu  
Tel: +86 028 85783758

杭州 | Hangzhou  
杭州市滨江区西兴街道物联  
网街277号中胜大厦  
Wulianwang road 277,  
Zhongsheng Building,  
Binjiang, Hangzhou.  
Tel: +86 18001983519

sales@fullhan.com  
marketing@fullhan.com  
www.fullhan.com  
stock: 300613.sz

